



TMP Solutions

Unit 6 Trident Drive, Wednesbury,
West Midlands. WS10 7XB

0208 744 8201
www.tmp.solutions



Metro 2.0

Retro-reflective self-righting bollard
Perfect for urban and rural applications

PassiveSAFE[®]

Rebounds on impact and fully compliant
to BS EN 12767:2019

A traditional rounded shape traffic bollard with zero maintenance

A non-illuminated and passively safe bollard that is fully compliant for use on the UK highways. The standard Metro comes complete with a D610 Keep Left roundel on the front and plain black back, but there are many other variants available.

- Full 360° visibility
- Easy to install
- Single or double aspect
- 100% Recyclable shell
- BS 8442:2015 compliant
- All reflective material meets BS 8408:2005
- BS EN 12767:2019 Passively Safe
- 12 Year 3M backed delamination warranty




All TMP RSRBs are passively safe


The classical TMP Metro traffic bollard has all the latest performance qualities of the rest of the range of RSRBs but with a more traditional rounded shape. Perfect for placing in urban or rural situations. The Metro bollard has been designed to be installed without the need for electrical illumination making it quick and easy to install. The advanced retro-reflective panels on the Metro RSRB harnesses the light from vehicle headlights to illuminate the sign face without electricity or harmful carbon emissions.

Not only is it safe for the environment, but the Metro bollard is also passively safe to road users. The unique bollard base and durable polypropylene construction ensure the bollard will yield to impact but rebound back to an upright position.

Specifications

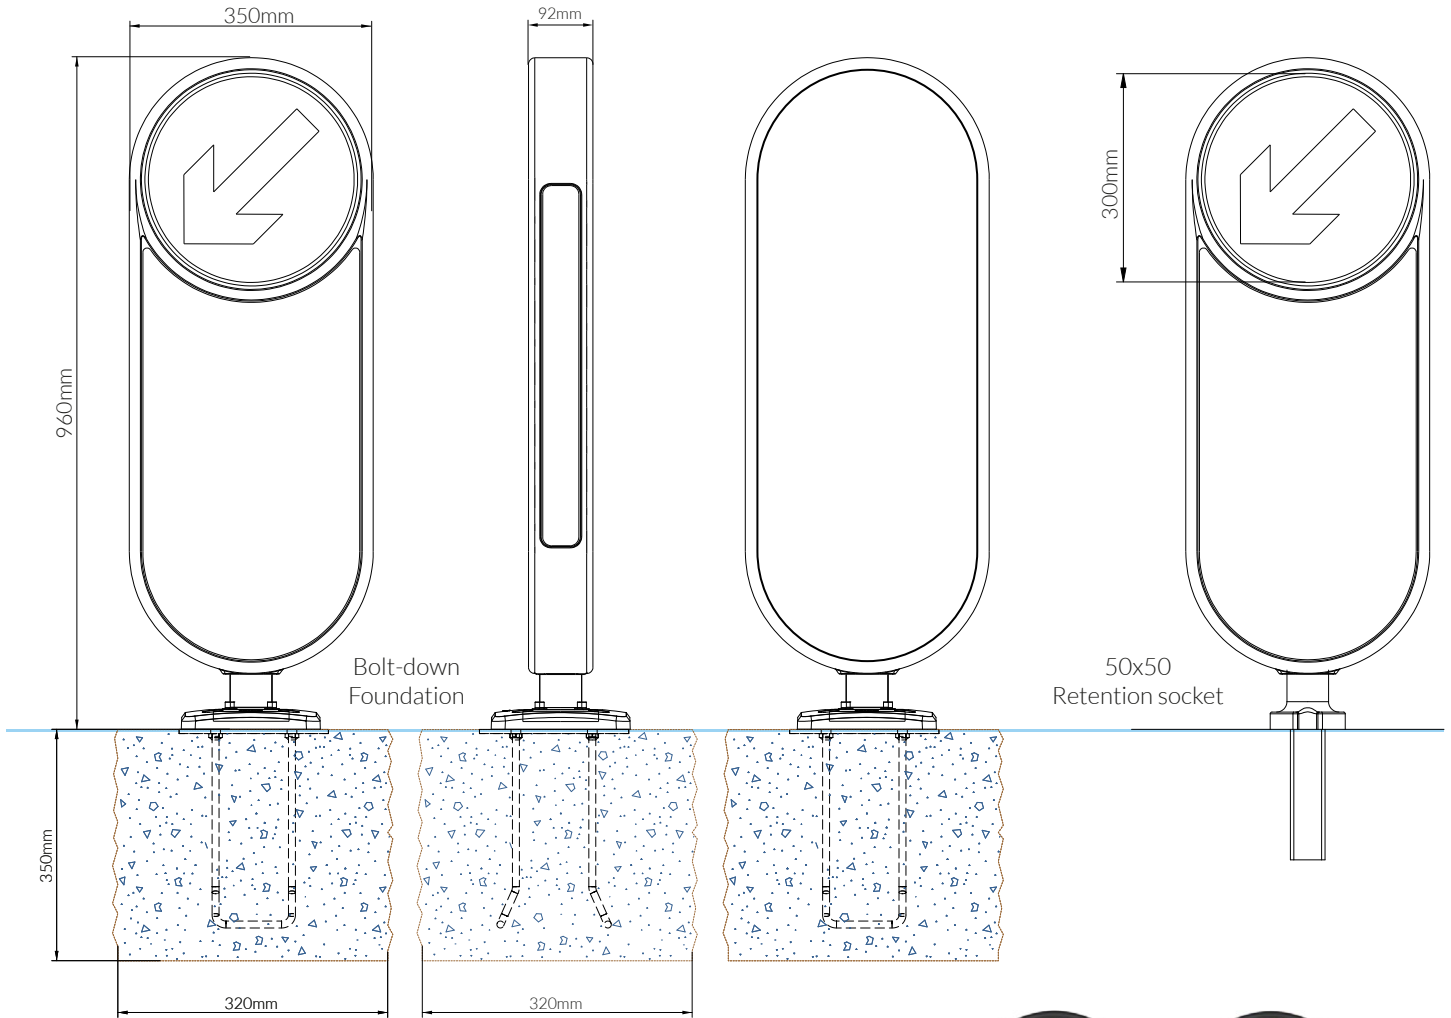

Material	Rotationally moulded polyethylene
Colour	Black / White
Protection	Recessed reflective panels & anti-vandal fixings
Corrosive Resistance	SP1/SP2
Installation Options	Foundation cage, retention socket or base light conversion
Reflective Material	3M Diamond Grade DG3 Series 4000 Fully compliant with Class R3B, EN12899-1:2007
Sign Face	300mm (single or double sided)
Front Reflector	305mm wide x 558mm high
Rear Reflector (optional)	305mm wide x 842mm high
Side Reflector	50mm wide
BS8442:2015	Fully compliant
BS EN 12767:2007	100:NE:4
BS EN 12767:2019	100-NE-A-R-NS-MD-0 70-NE-A-R-NS-MD-0 50-NE-A-R-NS-MD-0
Warranty	12yr Delamination warranty backed by 3M 3yr Manufacturer's warranty
Recyclable	Yes

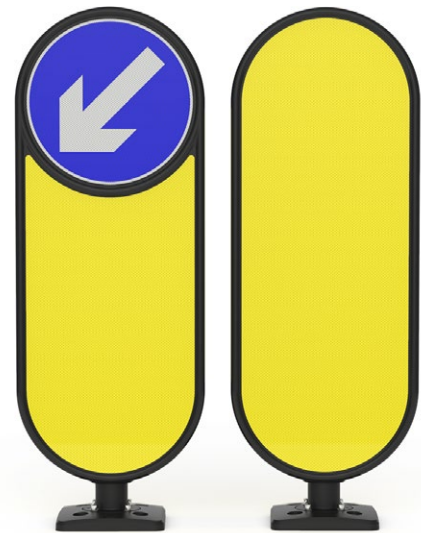

Zero Maintenance

The Metro needs no additional maintenance. As with all devices installed on the highway, external surfaces should be periodically cleaned with diluted mild detergent.

Versatile Installation



Foundation Cage



Retention Socket



Base Light Conversion



Manufactured in the UK

